

FR.35.01-AVA


AVA Series


The compact equipments from the AVA series, are specially completly mounted to reduce the costs of erection at destination. They are exempt of water treatment and norms drifted from the Legionella legislation.


The adiabatic coolers from the AVA series offers a cooling capacity up to 578 kW per unit, improving substantially the electric consumption in comparison to the dry-coolers and getting close to the optimal values for the outlet temperatures that you would get with the evaporative coolers.






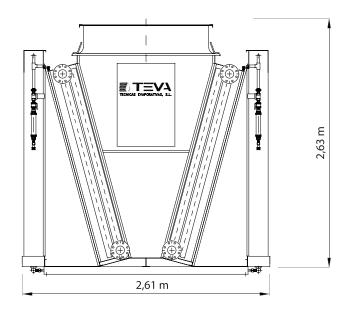



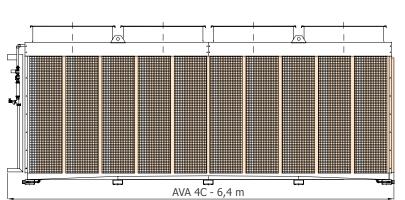



[+		1	T	-			
	l		1	:						
Ř										
1111										
										
AVA 5C - 7,9 m										
	AVA 3C - 7,9 III									

Model	Quantity x kW Motors				
AVA 2C523	2 x 5,5				
AVA 2C524	2 x 5,5				
AVA 2C525	2 x 5,5				
AVA 2C526	2 x 7,5				
AVA 3C523	3 x 5,5				
AVA 3C524	3 x 5,5				
AVA 3C525	3 x 5,5				
AVA 3C526	3 x 7,5				
AVA 4C523	4 x 5,5				
AVA 4C524	4 x 5,5				
AVA 4C525	4 x 5,5				
AVA 4C526	4 x 7,5				
AVA 5C524	5 x 5,5				
AVA 5C525	5 x 5,5				
AVA 5C526	5 x 7,5				
AVA 6C524	6 x 5,5				
AVA 6C525	6 x 5,5				
AVA 6C526	6 x 7,5				

